


MR16 UV-cut with cover glass

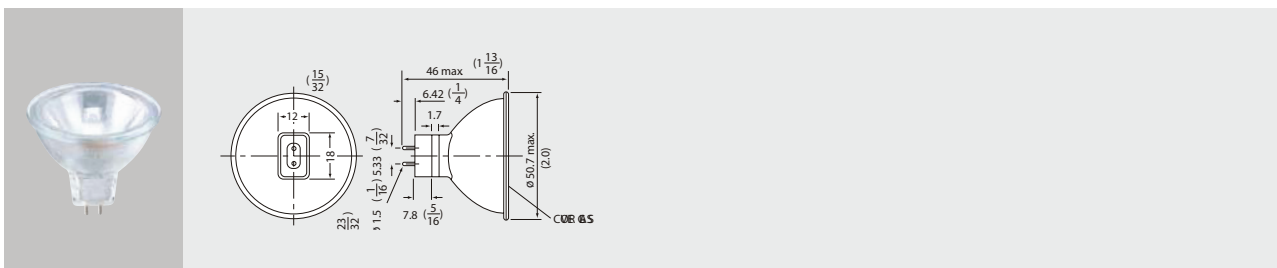

PHYSICAL DATA AND CHARACTERISTICS

Type	Ref. ANSI	Volts (V)	Watts (W)	Base	Std. Pkg. Qty.	Axis Cd (cd)	Beam Angle (°)	Rated Av. Life (hrs)
JR5251	ESX	12	20	GU5.3	12	4000	12	4000
JR5253	BAB	12	20	GU5.3	12	500	38	4000
JR5351	FRB	12	35	GU5.3	12	7600	12	5000
JR5352	FRA	12	35	GU5.3	12	2300	23	5000
JR5353	FMW	12	35	GU5.3	12	1100	38	5000
JR5551	EXT	12	50	GU5.3	12	9800	13	5000
JR5552	EXZ	12	50	GU5.3	12	3200	26	5000
JR5553	ENL	12	50	GU5.3	12	2250	32	5000
JR5554	EXN	12	50	GU5.3	12	1600	38	5000
JR5566	FNV	12	50	GU5.3	12	700	55	5000
JR6651	FPA	12	65	GU5.3	12	12000	13	5000
JR6652	FPC	12	65	GU5.3	12	4100	26	5000
JR6653	FPB	12	65	GU5.3	12	2100	38	5000

MR16 low voltage halogen lamp with cover glass with UV reduction coating.

FEATURES

- UV reduction coating on cover glass
- Precise optical design.
- Long lasting dichroic coating.
- Reliable long life.
- Suitable for retail stores, lounges, museums, offices, landscape lighting, display cases.

