

DOCKLITE



The Docklite is a tough wall mount fixture that is adjustable. It is designed to illuminate the back of delivery vehicles from a loading dock. This fixture is also used for heavy-duty task illumination over automated machines such as lathes. The strong mounting arm provides infinite one arm adjustment. The Docklite is fitted with an E27 lamp holder for use with either a PAR 38 150W incandescent lamp. Other ideal application locations include airports, food plants and cargo terminals.

FEATURES

BODY

The body consists of an adjustable arm and lamp housing. The lamp housing is made from spun aluminium and accommodates a typical PAR-38 (120mm) lamp. The adjustable arm extends to 1060mm (42 inches) and is made from 38mm square steel tubing. Both are powder-coated in "Safety Yellow". All adjustable joints are fitted with heavy-duty zinc plated bolts, washers and lock nuts.

LENS

The lamp housing is open without a lens cover.

REFLECTOR

The fixture utilises a lamp with an in-built reflector. The reflector is renewed with each lamp change thus ensuring on-going high performance.


GEAR

No control gear is required when used with incandescent, halogen, CFLi, or self-ballasted mercury vapour PAR/reflector lamps (ie, BHR 160 type).

INSTALLATION & MAINTENANCE

The Docklite is supplied fully assembled with a flex cable (including a flat earth pin and plug) and zinc plated heavy-duty steel mounting bracket ready to be fixed to a wall. A switch is recessed into the fixture arm for ease of operation.

MEASUREMENTS

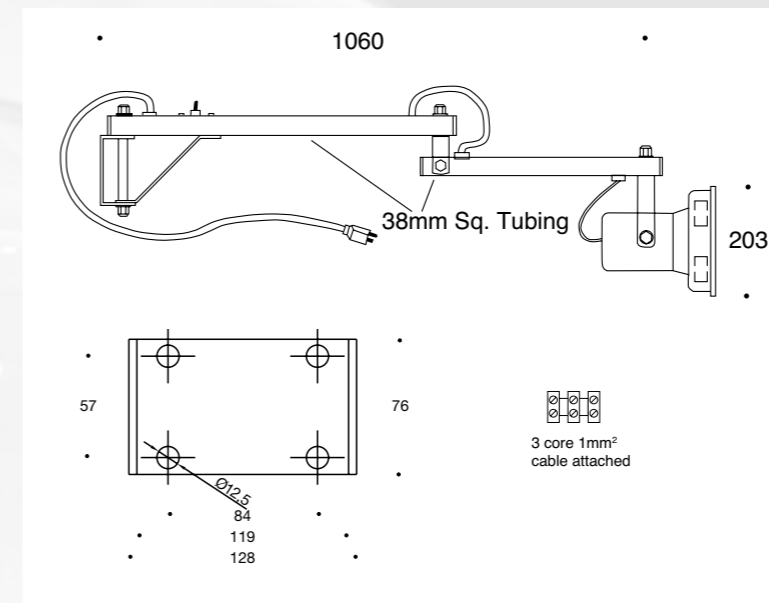

CODE	PRODUCT DESCRIPTION	WATTAGE	TYPE	LAMP	CONTROL GEAR	LIGHT DISTRIBUTION	REFLECTOR TYPE
251600	DOCKLITE D3 WITH 42" ARM (1060mm)	Up to 160W	SBMV or TH	BHR160W/RSP38 (also takes other PAR30 and PAR 38 types)	NONE REQUIRED	WIDE BEAM	USES REPLACEABLE REFLECTOR LAMPS

Operates direct from 240V 50Hz mains power source, no control gear required

Fixture operates direct from 240V 50Hz mains power source, no control gear required. Pictorial is representative only. Specifications may change without notice.



DOCKLITE

