

LIGHT LIFTER



The **Light Lifter** is a simple system that delivers re-lamping and maintenance access for luminaires that need to be positioned above inaccessible areas. An adjustable winch plate fixes to the vertical 'I' beam. The wire rope is shackled to the cable lock. The electrical connection is located conveniently near the plate. To operate, a removable winch is simply attached to the winch mount plate, the wire ropes are shackled together, the electrical connection unplugged and the luminaire is raised or lowered as required.

FEATURES

BODY

The Light Lifter consists of a safety winch, cable and a series of hangers/pulley block assemblies. The exact configuration depends on the area to be serviced (eg, the height and luminaire distance from where the winch mount plate is attached). All components are of stainless steel or hot-dipped galvanised steel.


INSTALLATION & MAINTENANCE

Two preconfigured kits are available which include either a 15 metre or 30 metre cable, hanger and pulley set-up. A worm-drive winch is also required to complete the system


and is removable once a luminaire is raised or lowered because of the cable lock system. The Light Lifter system can be fully customised to suit each installation requirement. All components can be easily installed with a spanner. The system is rated for a 50kg load. Electrical wiring and connections must be installed by a licensed electrician.

SPECIAL FEATURES

The Light Lifter is easy to position and readily accommodates sloping ceilings. An electric reversible drill attachment can be used to operate the winch.

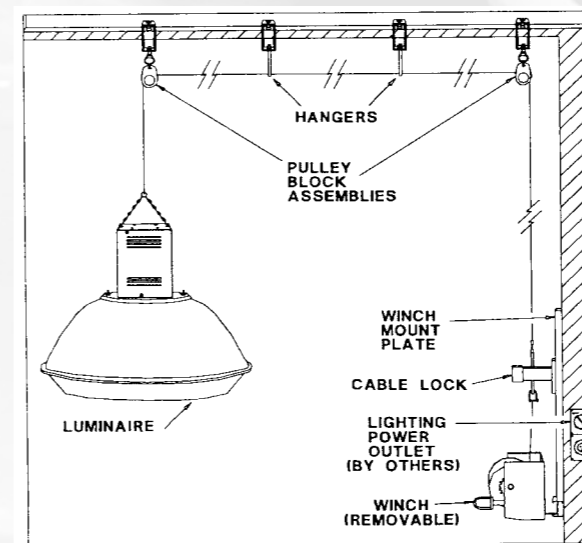

CODE	PRODUCT DESCRIPTION
253800	LIGHT LIFTER KIT - 15 METRE LENGTH
253805	LIGHT LIFTER KIT - 30 METRE LENGTH
253810	LIGHT LIFTER SAFETY WINCH

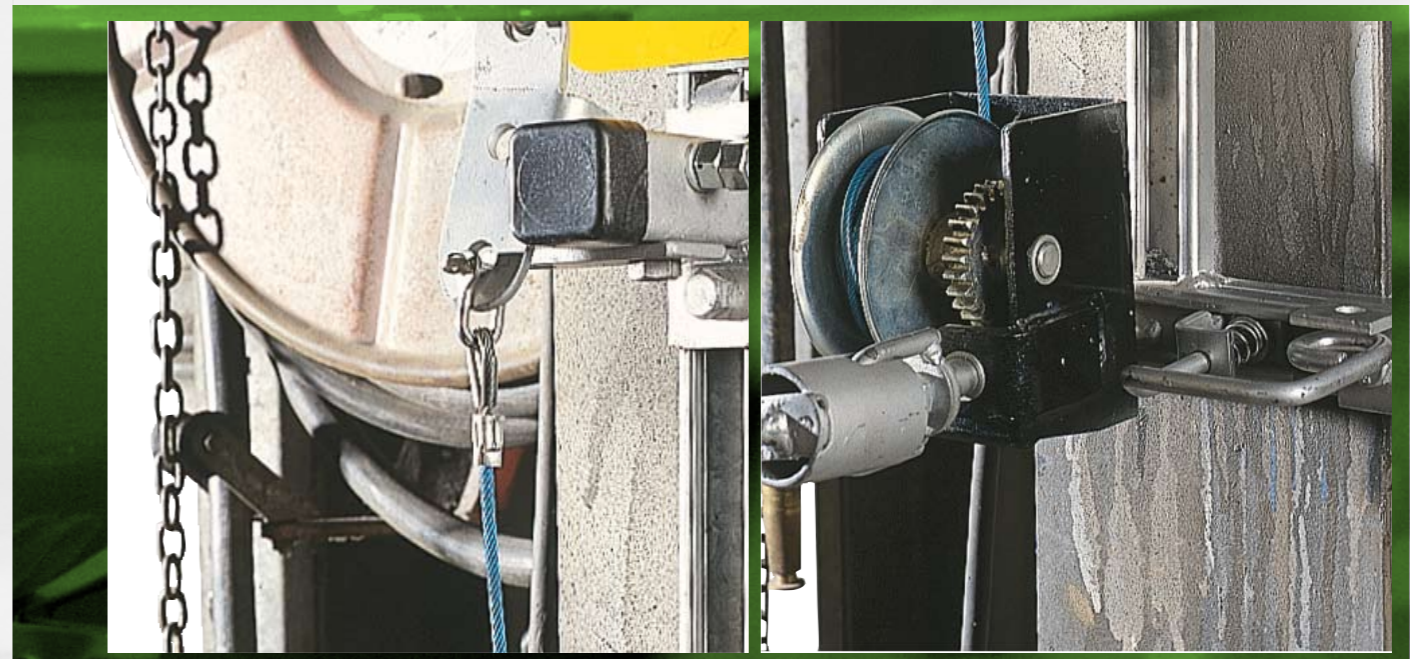

LIGHT LIFTER



14.0 kg



Class I

